


HID Explosion proof lighting



Suspended mounting



Ceiling mounting

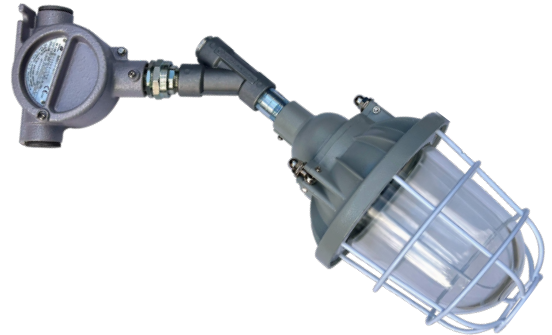

Wall mounting

Technical Parameters

Type	BCD		
European (ATEX)	ECM 21 ATEX-B D077	CE 1282	Ex II 2G Ex d e IIC T6 Gb
Gas and Dust	ECM 21 ATEX-E D078	CE 1282	Ex II 2D Ex tb Db
Rated voltage	220VAC, 50-60Hz	IP Degree	IP66

Model	BCD-100	BCD-200	BCD-200B	BCD-250	BCD-400
Lamp Holder	E27	E27	E27	E40	E40
Metal Halide Lamp	/	70/100/150/175W	70/100/150/175W	250W	400W
High Pressure Sodium L.	/	70/100/110/150W	70/100/110/150W	250W	400W
High Pressure Mercury L.	/	80/125/160W	80/125/160W	175/250W	400/450W
Energy Saving Bulb	15W	36W	36W	105W	150W
LED Bulb	8W	15W	15W	36W	/
Weight	1.40 kg	2.00 kg	2.87 kg	3.78 kg	6.31 kg
Conduit Entry	G 3/4"	G 3/4"	G 3/4"	G 3/4"	G 3/4"

Features:

- * Zone 1&2, Zone 21&22.
- * Housing is made of die-cast aluminum, with epoxy sprayed.
- * Tempered glass shade, stainless steel exposed fasteners, with galvanized and epoxy coated guard.
- * Rotary opening, easy installation and maintenance.
- * Optional lamp shade.

HID Explosion proof lighting

Dimension & Installation [mm]

BCD-100

BCD-200


BCD-200B

BCD-250






BCD-400



BCD-200



BCD-400

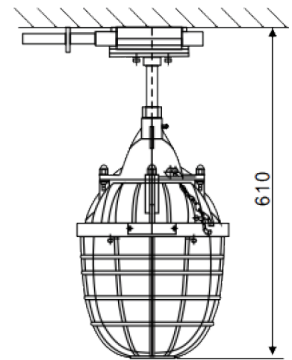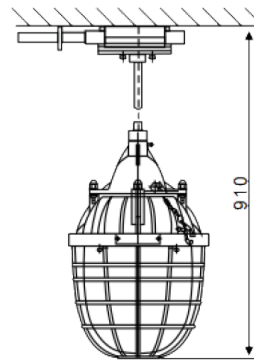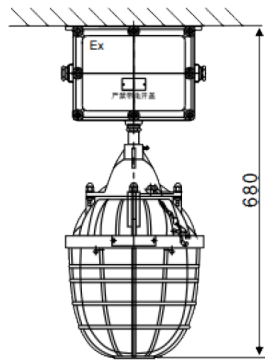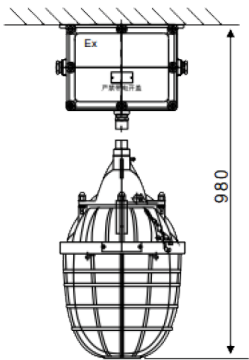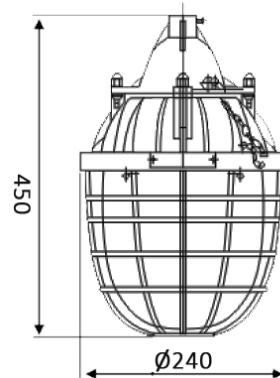

Pendant

Ceiling