


## Explosion Proof FLEXIBLE CONDUIT (Male-Male)



### Technical Parameters

European (ATEX)	0H230103.CEL0021	2014 / 34 / EU
Ex Marking	 II 2G Ex db IIC T6 Gb / II 2D Ex tb IIIC T80°C Db	
IP Degree	IP65	Waterproof Degree: WF2


#### Features:

- \* Zone 1 & 2, Zone 20 & 21 & 22
- \* The exterior is made of 304 stainless steel, IP65 grade anti-corrosion engineering rubber and stainless steel wire weaving materials, which are waterproof, explosion-proof, anti-corrosion and dust-proof.
- \* The thread could be specially made upon request, such as NPT, G thread
- \* The length of the flexible conduit can be specially made upon request.



## Explosion Proof FLEXIBLE CONDUIT (Male-Male)

### Dimension [mm]

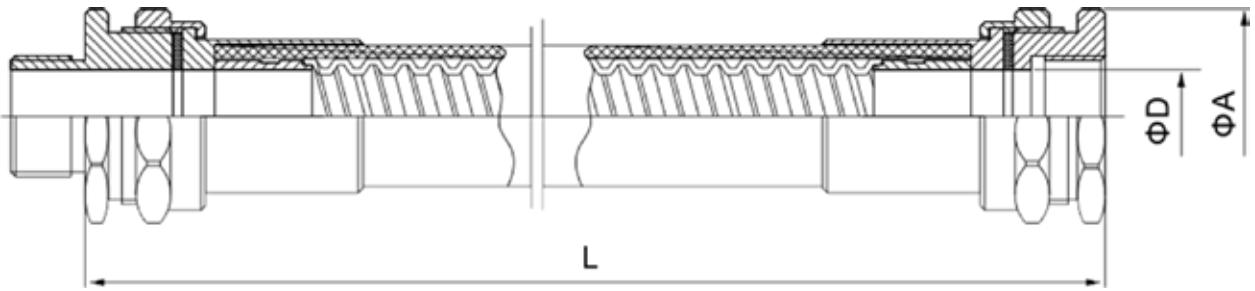

**Fittings: (Movable) slewing Male and Fixed Male**

Type	Thread Size	Length	min. bending radius
BNG-1-50	NPT 1/2"	50 cm	80 mm
BNG-1-100	NPT 1/2"	100 cm	80 mm
BNG-2-50	NPT 3/4"	50 cm	110 mm
BNG-2-100	NPT 3/4"	100 cm	110 mm